




DEKO UNO S 1 + SL 1




DEKO UNO S 2 + SL 2




DEKO UNO S 3 + SL 3

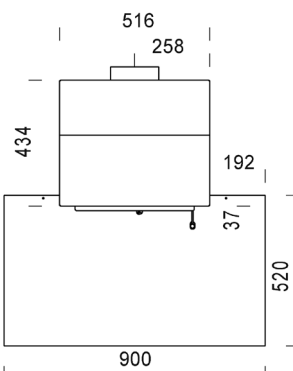

DEKO UNO SB 1

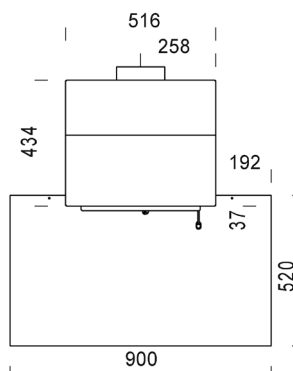

DEKO UNO SB 2

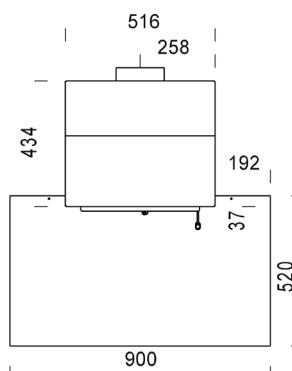

DEKO UNO SB 3

Product pictures are with accessories.

PRODUCT INFORMATION:

Nominal heat output: 6 kW
 Energy efficiency: 81 %
 CO%: 0,07 %

PRODUCT NUMBERS:

Product	Product number	Weight kg	Height mm
DEKO UNO S 1	703350-1	361	1200
DEKO UNO S 2	703350-2	341	1200
DEKO UNO S 3	703350-3	341	1200
DEKO UNO SB 1	703355-1	361	1200
DEKO UNO SB 2	703355-2	341	1200
DEKO UNO SB 3	703355-3	341	1200
DEKO UNO SL 1	703357-1	298	1200
DEKO UNO SL 2	703357-2	278	1200
DEKO UNO SL 3	703357-3	278	1200

ACCESSORIES:

Product	Product number	Weight kg	Height mm
Bottom plinth US	707941	37	102
Floor protector US white	920333		
Floor protector US black	920331		

PRODUCT INFORMATION

	FIREWOOD		FLUE CALCULATION VALUES (1)				MAX. FLUE TEMPERATURE IN SECURITY TEST
	Length [cm]	Max amount of wood [kg/h]	Flue gas temperature [°C]	Min. flue draught [Pa]	Mass flow [g/s]	Flue connection Ø (min.)	Temperature °C
Deko Uno S / SB / SL	25	1,65	255	-12	6,6	150	499

FLUE CONNECTION TABLE

	RECOMMENDED FLUE [mm]
	round Ø
Deko Uno S / SB / SL	150

SAFETY DISTANCES TO COMBUSTIBLE MATERIALS

	CE-approval according to EN 13240		
	Behind	On the sides	Front
Deko Uno S / SB	350	300	1100
Deko Uno SL	70	300	1100

1) The flue calculation values apply for countries that require flue calculation in accordance with the DIN 18160 and DIN EN 13384 standards.

Take a notice of the countryspecific approvals in section 3

NOTES!

The recommended minimum flue height is 5 m. In countries where the flue calculation is required, should the calculation be done according to the instructions and regulations of the flue calculation.

A damper designed for adjusting the draft is always recommended for a flue connection or flue.

Country- and region-specific regulations must be adhered to when installing the fireplace

