



IISA DUO 1



IISA DUO 2

PRODUCT INFORMATION:

Thermal energy:	77-87 kWh
Energy efficiency:	84 %
CO%:	0,11%
Nominal heat output:	2,5 kW / 6,8 h
Heat storage capacity:	
	100% after 6,8 hours
	50% after 25,9 hours
	25% after 41,2 hours

PRODUCT NUMBERS:

Product	Product number	Weight kg	Height mm
IISA DUO 1	606081-1	2475	1715
IISA DUO 2	606081-2	2540	1715

BOTTOM PLINTH:

IISA DUO	200544	170	70
----------	--------	-----	----


CHANGE OPTIONS:

* Extra layer 280 mm for outer stones


NEEDED FOR ASSEMBLY:

* Mortar 2 x 25 kg (not included in NunnaUuni delivery)

LAYOUT DRAWINGS:

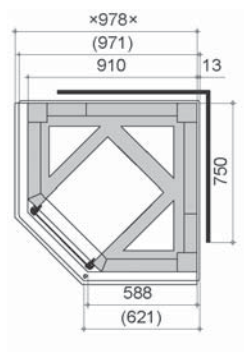

IISA DUO 1

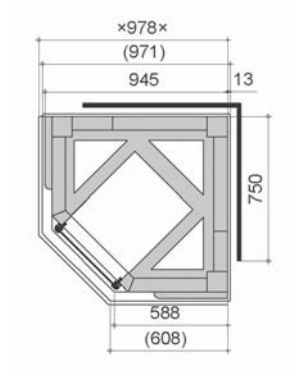

IISA DUO 2

x...x, Measurement incl. shelf
(...), Bottom plinth dimensions

PRODUCT INFORMATION

	BAKING OVEN / BAKING SPACE		FIREWOOD			FLUE CALCULATION VALUES ⁽¹⁾					
	Width [mm]	Depth [mm]	Length fireplace / cooker [cm]	Max amount of wood [kg]	Length baking oven [cm]	Flue gas temperature [°C]	Min. flue draught [Pa]	Mass flow [g/s]	Burning heat output [kW]	Flue connection [A/B] Ø	Burning air approx. m³/h
lisa Duo	424	470	33	24	33	204	16	37	37,3	180	100

FLUE CONNECTION TABLE

	RECOMMENDED FLUE [mm]				FLUE CONNECTION MEASUREMENTS [mm]			INCOMING AIR		
	approx. 150x150	approx. 150x200	approx. 150x300	round Ø	[A]	[B]	[C] ⁽²⁾	Incoming air pipe location L [mm]	Replacement air unit	HRT
lisa Duo	-	x	x	180-210	150-200	300	300 (round connection: 260)	915	900307	-

SAFETY DISTANCES TO COMBUSTIBLE MATERIALS

	According to EN 15250	
	Behind	On the sides
lisa Duo	150	150

- ¹⁾ The flue calculation values apply for countries that require flue calculation in accordance with the DIN 18160 and DIN EN 13384 standards. It is recommendable to contact chimney sweeper beforehand.
- ²⁾ When installing with bottom plinth, flue connection (+70mm) will be raised according to thickness of the plinth.

Take a notice of the countryspecific approvals in section 3

NOTES!

The flue heat category required by the fireplace is T350.

The recommended minimum flue height is 5 m with Ø180 mm. In countries where the flue calculation is required, should the calculation be done according to the instructions and regulations of the flue calculation.

A damper designed for adjusting the draft is always recommended for a flue connection or flue.

Country- and region-specific regulations must be adhered to when installing the fireplace

