



SABRINA 1

PRODUCT INFORMATION:

Thermal energy: 33-37 kWh
Energy efficiency: 81 %
CO%: 0,12 %
Nominal heat output: 1,4 kW / 7,7 hours
Heat storage capacity:
 100% after 4,1 hours
 50% after 16,2 hours
 25% after 25,9 hours

PRODUCT NUMBER:

| Product | Product number | Weight kg | Height mm |
|-----------|----------------|-----------|-----------|
| SABRINA 1 | 606161-1 | 1120 | 1295 |

BOTTOM PLINTH:

| | | | |
|-----------|--------|----|----|
| SABRINA 1 | 200514 | 95 | 70 |
|-----------|--------|----|----|


CHANGE OPTIONS:

- * Extra layer 280 mm for inner stones
- * Extra layer 280 mm for outer stones
- * Top connection (depth +140 mm, Ø150 mm)

NEEDED FOR ASSEMBLY:

- * Mortar 1 x 25 kg (not included in NunnaUuni delivery)

LAYOUT DRAWINGS:

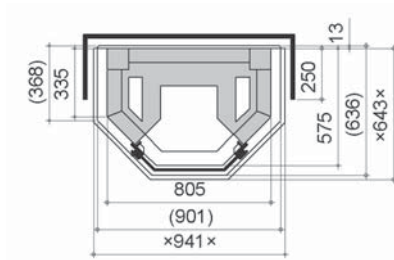

SABRINA 1

x...x, Measurement incl. shelf
 (...), Bottom plinth dimensions

PRODUCT INFORMATION

| | BAKING OVEN / BAKING SPACE | | FIREWOOD | | | FLUE CALCULATION VALUES (1) | | | | | |
|---------|----------------------------|------------|--------------------------------|-------------------------|-------------------------|-----------------------------|------------------------|-----------------|--------------------------|-------------------------|--------------------------|
| | Width [mm] | Depth [mm] | Length fireplace / cooker [cm] | Max amount of wood [kg] | Length baking oven [cm] | Flue gas temperature [°C] | Min. flue draught [Pa] | Mass flow [g/s] | Burning heat output [kW] | Flue connection [A/B] Ø | Burning air approx. m³/h |
| Sabrina | - | - | 25 | 10 | - | 215 | 16 | 26,6 | 29,4 | 180 | 75 |

FLUE CONNECTION TABLE

| | RECOMMENDED FLUE [mm] | | | | FLUE CONNECTION MEASUREMENTS [mm] | | | INCOMING AIR | | |
|---------|-----------------------|-----------------|-----------------|---------|-----------------------------------|-----|-----------------------------|-----------------------------------|----------------------|--------|
| | approx. 150x150 | approx. 150x200 | approx. 150x300 | round Ø | [A] | [B] | [C] (2) | Incoming air pipe location L [mm] | Replacement air unit | HRT |
| Sabrina | x | x | - | 150-180 | 150-200 | 300 | 300 (round connection: 260) | 435 | - | 910400 |

SAFETY DISTANCES TO COMBUSTIBLE MATERIALS

| | According to EN 15250 | |
|---------|-----------------------|--------------|
| | Behind | On the sides |
| Sabrina | 150 | 150 |

- 1) The flue calculation values apply for countries that require flue calculation in accordance with the DIN 18160 and DIN EN 13384 standards. It is recommendable to contact chimney sweeper beforehand.
- 2) When installing with bottom plinth, flue connection (+70mm) will be raised according to thickness of the plinth.

Take a notice of the countryspecific approvals in section 3

NOTES!

The flue heat category required by the fireplace is T350.

The recommended minimum flue height is 5 m with Ø180 mm. In countries where the flue calculation is required, should the calculation be done according to the instructions and regulations of the flue calculation.

A damper designed for adjusting the draft is always recommended for a flue connection or flue.

Country- and region-specific regulations must be adhered to when installing the fireplace

