



SARIANNA 1

PRODUCT INFORMATION:

Thermal energy:	33-37 kWh
Energy efficiency:	80 %
CO%:	0,15 %
Nominal heat output:	1,4 kW / 7,6 h
Heat storage capacity:	
100%	after 4,1 hours
50%	after 18,3 hours
25%	after 32,1 hours



PRODUCT NUMBER:

Product	Product number	Weight kg	Height mm
SARIANNA 1	606171-1	1250	1295

BOTTOM PLINTH:

SARIANNA 1	200510	105	70
------------	--------	-----	----


SET PRICES FOR CUSTOMIZED CHANGES:

- \* Extra layer 280 mm for inner stones
- \* Extra layer 280 mm for outer stones
- \* Top connection

NEEDED FOR ASSEMBLY:

- \* Mortar 1 x 25 kg (not included in NunnaUni delivery)

LAYOUT DRAWINGS:

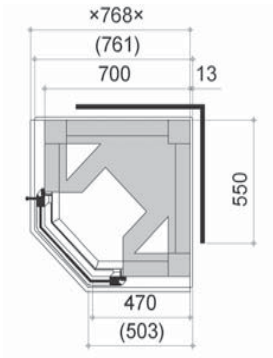

SARIANNA 1

x...x, Measurement incl. shelf  
(...), Bottom plinth dimensions

## PRODUCT INFORMATION

	BAKING OVEN / BAKING SPACE		FIREWOOD			ELECTRIC	FLUE CALCULATION VALUES <b>(2)</b>					
	Width [mm]	Depth [mm]	Length fireplace / cooker [cm]	Max amount of wood [kg]	Length baking oven [cm]	Electric resistor <b>(1)</b>	Flue gas temperature [°C]	Min. flue draught [Pa]	Mass flow [g/s]	Burning heat output [kW]	Flue connection [A/B] Ø	Burning air approx. m³/h
Sarianna	-	-	25	10	-	900220	200	17	28,2	29,2	180	75

## FLUE CONNECTION TABLE

	RECOMMENDED FLUE [mm]				FLUE CONNECTION MEASUREMENTS [mm]			IGNITION DAMPER [mm] <b>(3)</b>			INCOMING AIR		
	approx. 150x150	approx. 150x200	approx. 150x300	round Ø	[A]	[B]	[C] <b>(4)</b>	[A]	[B]	[C] <b>(4)</b>	Incoming air pipe location L [mm]	Replacement air unit	HRT
Sarianna	x	x	-	150-180	150-200	300	300 (round connection: 260)	150	220	1140	687	-	910400

## SAFETY DISTANCES TO COMBUSTIBLE MATERIALS

	According to EN 15250	
	Behind	On the sides
Sarianna	150	150

- 1)** Electric resistors are available only for deliveries within Finland.
- 2)** The flue calculation values apply for countries that require flue calculation in accordance with the DIN 18160 and DIN EN 13384 standards. It is recommendable to contact chimney sweeper beforehand.
- 3)** The use of an ignition damper is allowed only in Finland.
- 4)** When installing with bottom plinth, flue connection (+70mm) will be raised according to thickness of the plinth.

### Take a notice of the countryspecific approvals in section 3

#### NOTES!

The flue heat category required by the fireplace is T350.

The recommended minimum flue height is 5 m with Ø180 mm. In countries where the flue calculation is required, should the calculation be done according to the instructions and regulations of the flue calculation.

A damper designed for adjusting the draft is always recommended for a flue connection or flue.

### Country- and region-specific regulations must be adhered to when installing the fireplace

