




VIVECA 1

**PRODUCT INFORMATION:**

<b>Thermal energy:</b>	50-57 kWh
<b>Energy efficiency:</b>	82 %
<b>CO%:</b>	0,15 %
<b>Nominal heat output:</b>	2,5 kW / 8,5 hours
<b>Heat storage capacity:</b>	
	100% after 4,7 hours
	50% after 17,4 hours
	25% after 27,1 hours

**LAYOUT DRAWINGS:**

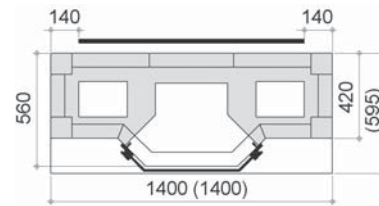

VIVECA 1

**PRODUCT NUMBER:**

Product	Product number	Weight kg	Height mm
VIVECA 1	606521-1	1820	1295

**BOTTOM PLINTH:**

VIVECA 1 & VIVECA 1 PL	200597	170	70
------------------------	--------	-----	----

**CHANGE OPTIONS:**

- \* VIVECA 1: Extra layer 280 mm for inner stones
- \* VIVECA 1: Extra layer 280 mm for outer stones
- \* Top connection (Ø 180 mm)

**NEEDED FOR ASSEMBLY:**

- \* Mortar 2 x 25 kg (not included in NunnaUuni delivery)

(...), Bottom plinth dimensions

## PRODUCT INFORMATION

	BAKING OVEN / BAKING SPACE		FIREWOOD			FLUE CALCULATION VALUES (1)					
	Width [mm]	Depth [mm]	Length fireplace / cooker [cm]	Max amount of wood [kg]	Length baking oven [cm]	Flue gas temperature [°C]	Min. flue draught [Pa]	Mass flow [g/s]	Burning heat output [kW]	Flue connection [A/B] Ø	Burning air approx. m³/h
Viveca 1	-	-	33	15	-	215	16	32,7	30,1	180	70

## FLUE CONNECTION TABLE

	RECOMMENDED FLUE [mm]				FLUE CONNECTION MEASUREMENTS [mm]			INCOMING AIR		
	approx. 150x150	approx. 150x200	approx. 150x300	round Ø	[A]	[B]	[C] (2)	Incoming air pipe location L [mm]	Replacement air unit	HRT
Viveca 1	-	x	x	180-210	150-200	300	300 (round connection 260)	420	-	910400

## SAFETY DISTANCES TO COMBUSTIBLE MATERIALS

	According to EN 15250	
	Behind	On the sides
Viveca 1	150	150

- 1) The flue calculation values apply for countries that require flue calculation in accordance with the DIN 18160 and DIN EN 13384 standards. It is recommendable to contact chimney sweeper beforehand.
- 2) When installing with bottom plinth, flue connection (+70mm) will be raised according to thickness of the plinth.

### Take a notice of the countryspecific approvals in section 3

#### NOTES!

The flue heat category required by the fireplace is T350.

The recommended minimum flue height is 5 m with Ø180 mm. In countries where the flue calculation is required, should the calculation be done according to the instructions and regulations of the flue calculation.

A damper designed for adjusting the draft is always recommended for a flue connection or flue.

### Country- and region-specific regulations must be adhered to when installing the fireplace

